




Jinan Kaiming Bearing Co., Ltd.

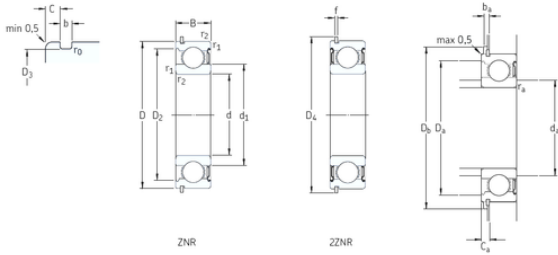

55 mm x 100 mm x 21 mm SKF 211-ZNR deep groove ball bearings

Bearing No. 211-ZNR

211-ZNR Bearing 2D drawings and 3D CAD models

Size	55x100x21 mm
Bore Diameter	55 mm
Outer Diameter	100 mm
Width	21 mm
d	55 mm
D	100 mm
B	21 mm
C	21 mm
b	2,7 mm
d1	69 mm
f	2,46 mm
r0 max.	0,6 mm
r1 min.	1,5 mm
r2 min.	1,5 mm
C	3,28 mm
D2	89,4 mm
D3	96,8 mm
D4	106,5 mm
ba min.	3 mm
Ca max.	5,74 mm
da min.	64 mm
da max	68,9 mm
Da max.	91 mm
Db min.	108 mm
ra max.	1,5 mm



Jinan Kaiming Bearing Co., Ltd.

Weight	0,66 Kg
Basic dynamic load rating (C)	48,4 kN
Basic static load rating (C0)	44 kN
Fatigue load limit (Pu)	1,86
Reference speed	12000 r/min
Limiting speed	7000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.72
EAN	7316576679803
Product Group	B00308
Enclosure	1 Metal Shield
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	Yes
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	55MM Bore; 100MM Outside Diameter; 21MM Outer Race Diameter; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; Yes Filling Slot; Yes Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing



Jinan Kaiming Bearing Co., Ltd.

Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	211 ZNR
Weight / LBS	1.47
Bore	2.165 Inch 55 Millimeter
Outside Diameter	3.937 Inch 100 Millimeter
Outer Race Width	0.827 Inch 21 Millimeter
bore diameter:	55 mm
static load capacity:	44 kN
outside diameter:	100 mm
precision rating:	ABEC 3 (ISO Class 6)
overall width:	21 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Single Shield
outer ring width:	21 mm
row type & fill slot:	Single Row Filling Slot
fillet radius:	1.5 mm
snap ring included:	With Snap Ring
maximum rpm:	7000 RPM
internal clearance:	C0
series:	21
dynamic load capacity:	48.4 kN
thrust application warning:	This product can not be used in Thrust Applications
d_1	69.06 mm
D_2	89.4 mm
D_3	96.8 mm
D_4	106.5 mm
r_0 max.	0.6 mm
$r_{1,2}$ min.	1.5 mm



Jinan Kaiming Bearing Co., Ltd.

d_a min.	64 mm
d_a max.	68.9 mm
D_a max.	91 mm
D_b min.	108 mm
b_a min.	3 mm
C_a max.	5.74 mm
r_a max.	1.5 mm
Basic dynamic load rating C	48.4 kN
Basic static load rating C_0	44 kN
Fatigue load limit P_u	1.86 kN
Calculation factor k_r	0.04
Mass bearing	0.66 kg
Snap ring	SP 100